

SOURCE SELECTOR SHOWN IN MAG PHONO POSITION,
MODE SELECTOR SHOWN IN LEFT AMP POSITION.

FOR VOLTAGE READINGS:


SOURCE SELECTOR MAG PHONO
MODE SELECTOR STEREO
VOLUME FULL CW
BASS AND TREBLE 1/2 ROTATION

NOTES:


SOURCE AND MODE SWITCHES ARE SHOWN IN MAX. CCW POSITION AS VIEWED FROM FRONT PANEL.
ALL CAPACITORS IN μF UNLESS OTHERWISE SPECIFIED.
ALL RESISTORS 1/2 WATT UNLESS OTHERWISE SPECIFIED.
→ INDICATES CLOCKWISE TRAVEL.
VOLTAGES TAKEN WITH HEATHKIT VTVM, 117 V AC LINE SOURCE.
SOURCE SELECTOR IN MAG. POSITION, VOLUME FULL CW, BASS AND TREBLE 1/2 ROTATION.
MODE SELECTOR IN STEREO POSITION FOR VOLTAGE READINGS.
OUTPUTS LOADED WITH 16 Ω 20 W RESISTORS.
○ INDICATES VOLTAGE READING.
ALL READINGS FROM TEST POINT TO COMMON GROUND.




STEREO AMPLIFIER
MODEL AA-151

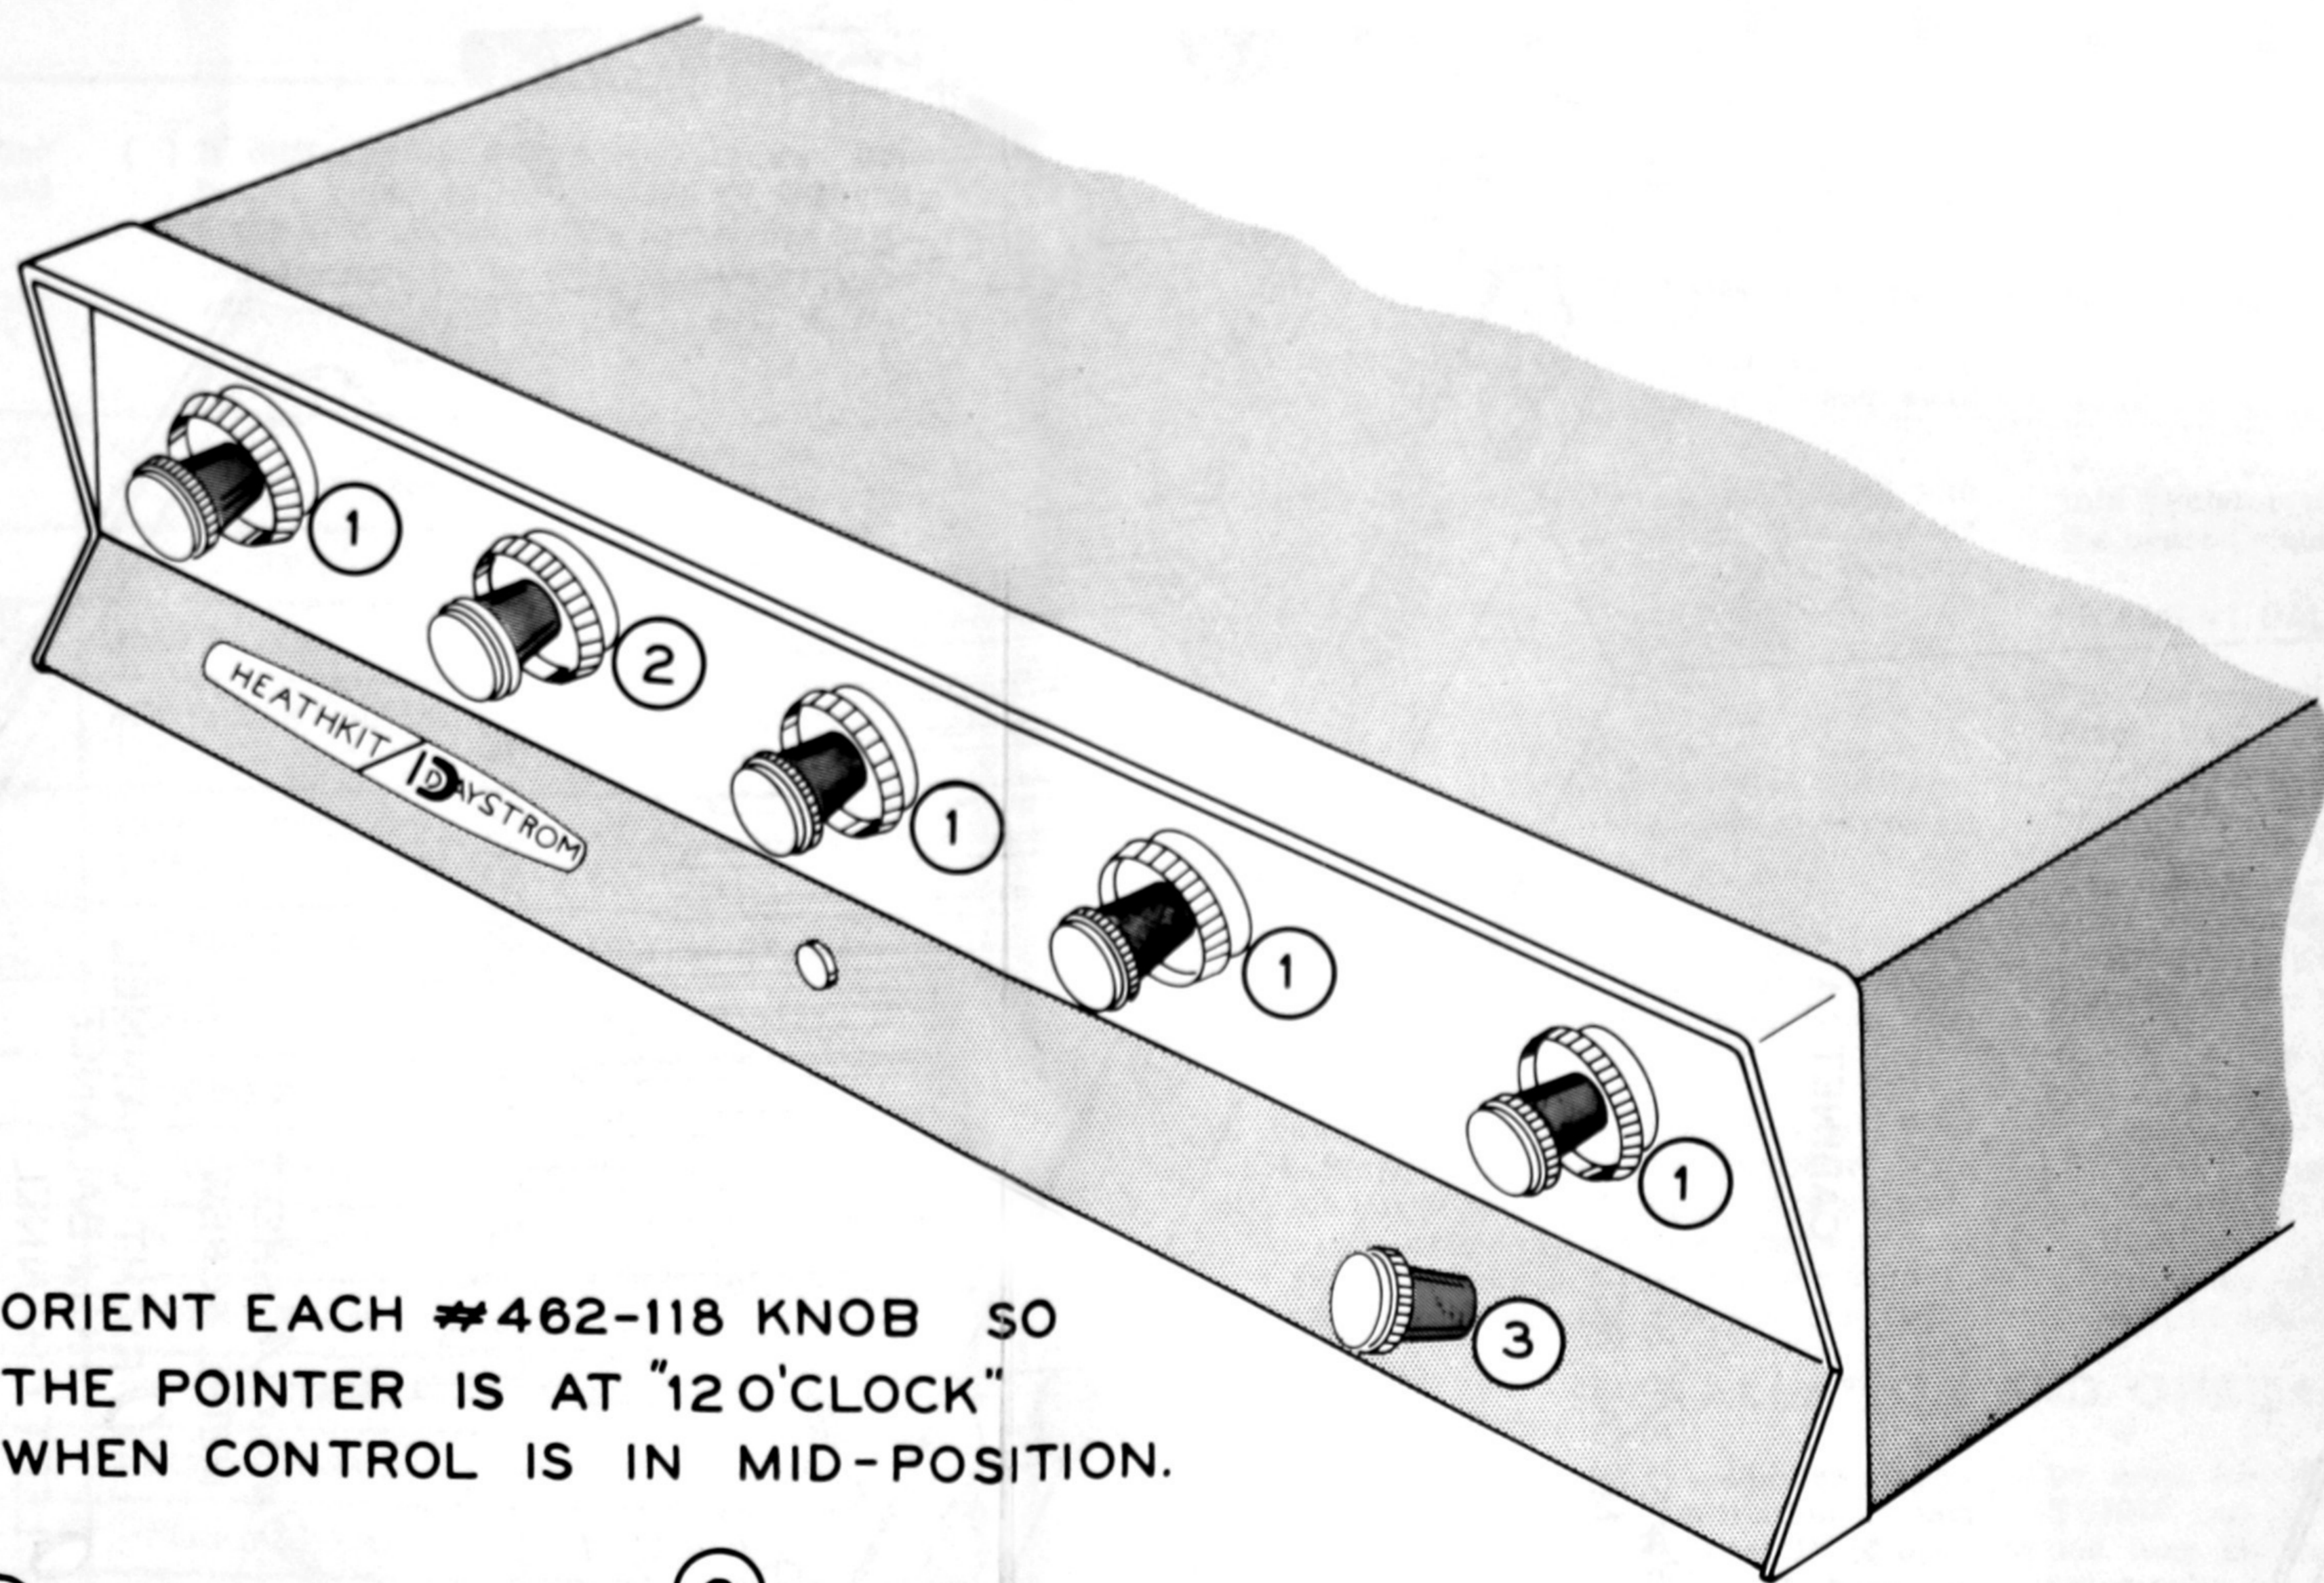


ORIENT EACH #462-118 KNOB SO
THE POINTER IS AT "12 O'CLOCK"
WHEN CONTROL IS IN MID-POSITION.

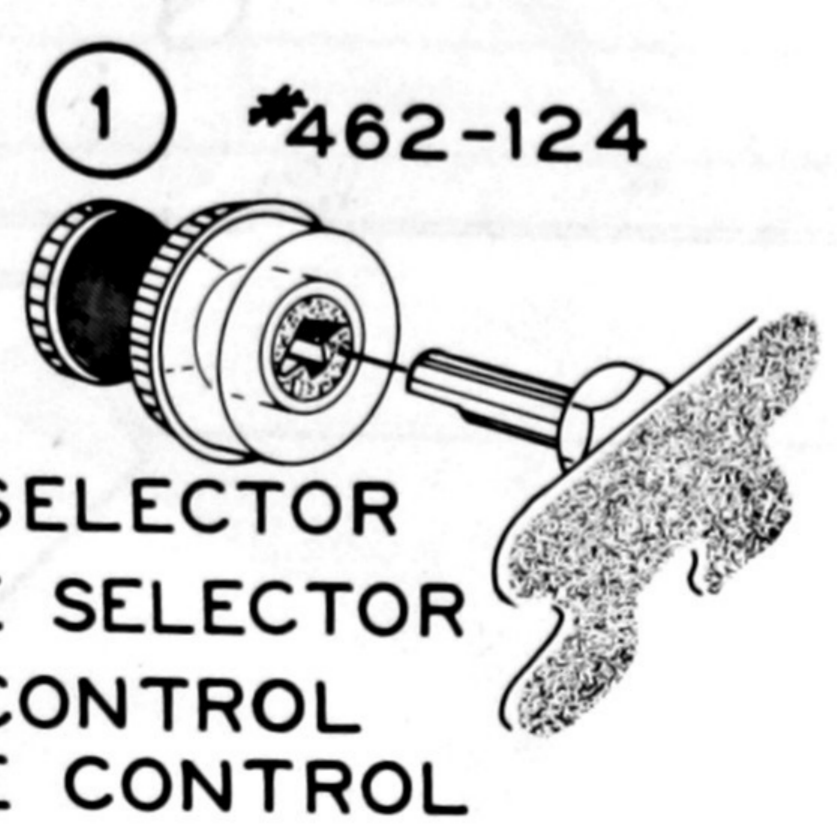


MODE SELECTOR
SOURCE SELECTOR
BASS CONTROL
TREBLE CONTROL

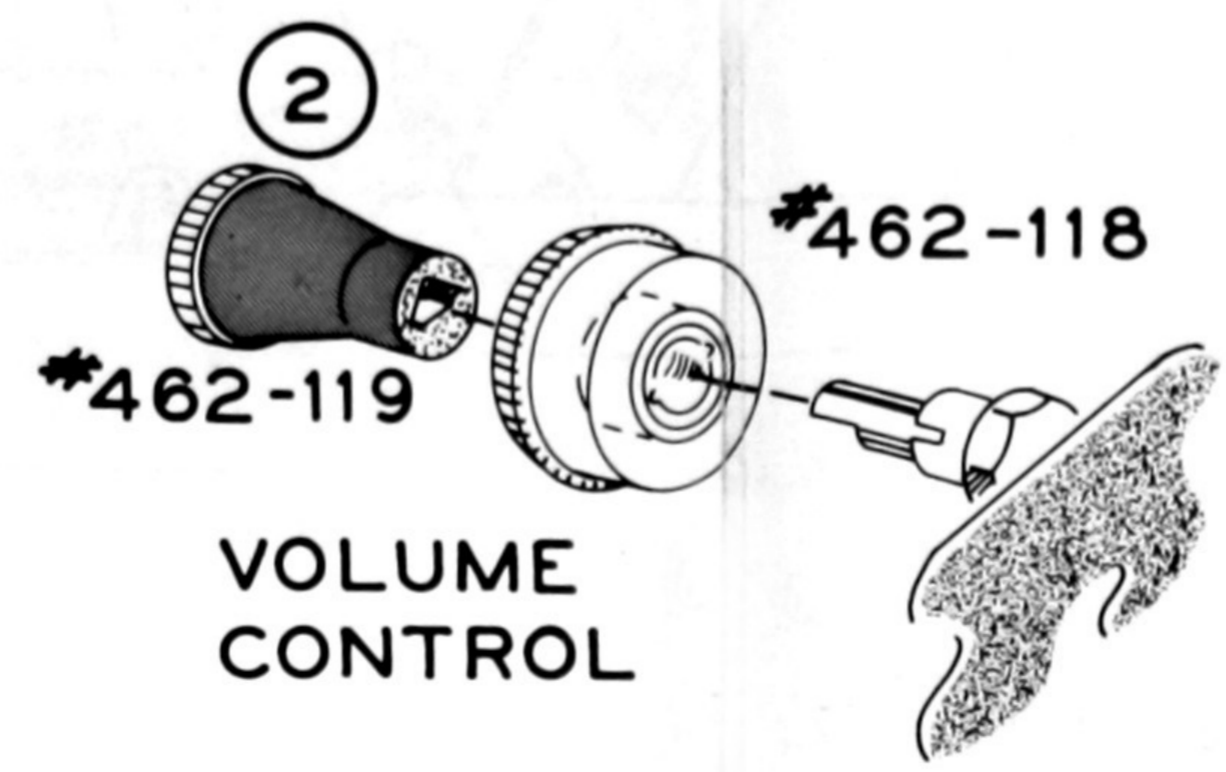


VOLUME
CONTROL

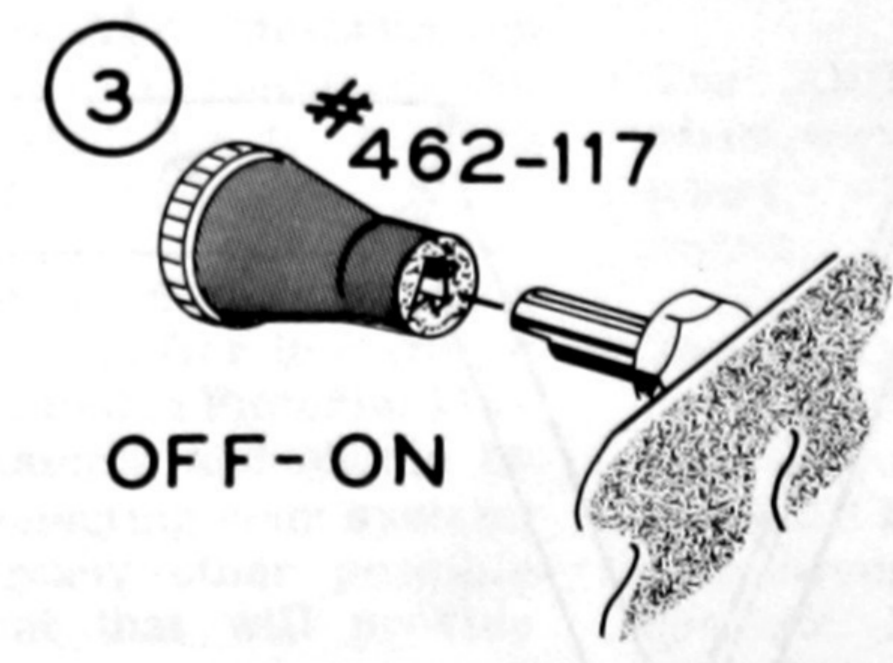


OFF-ON

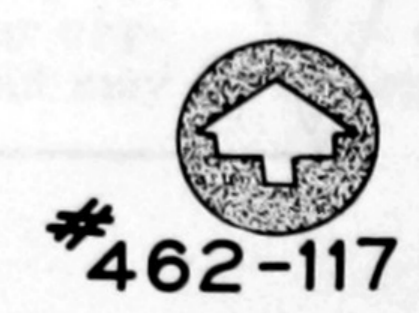


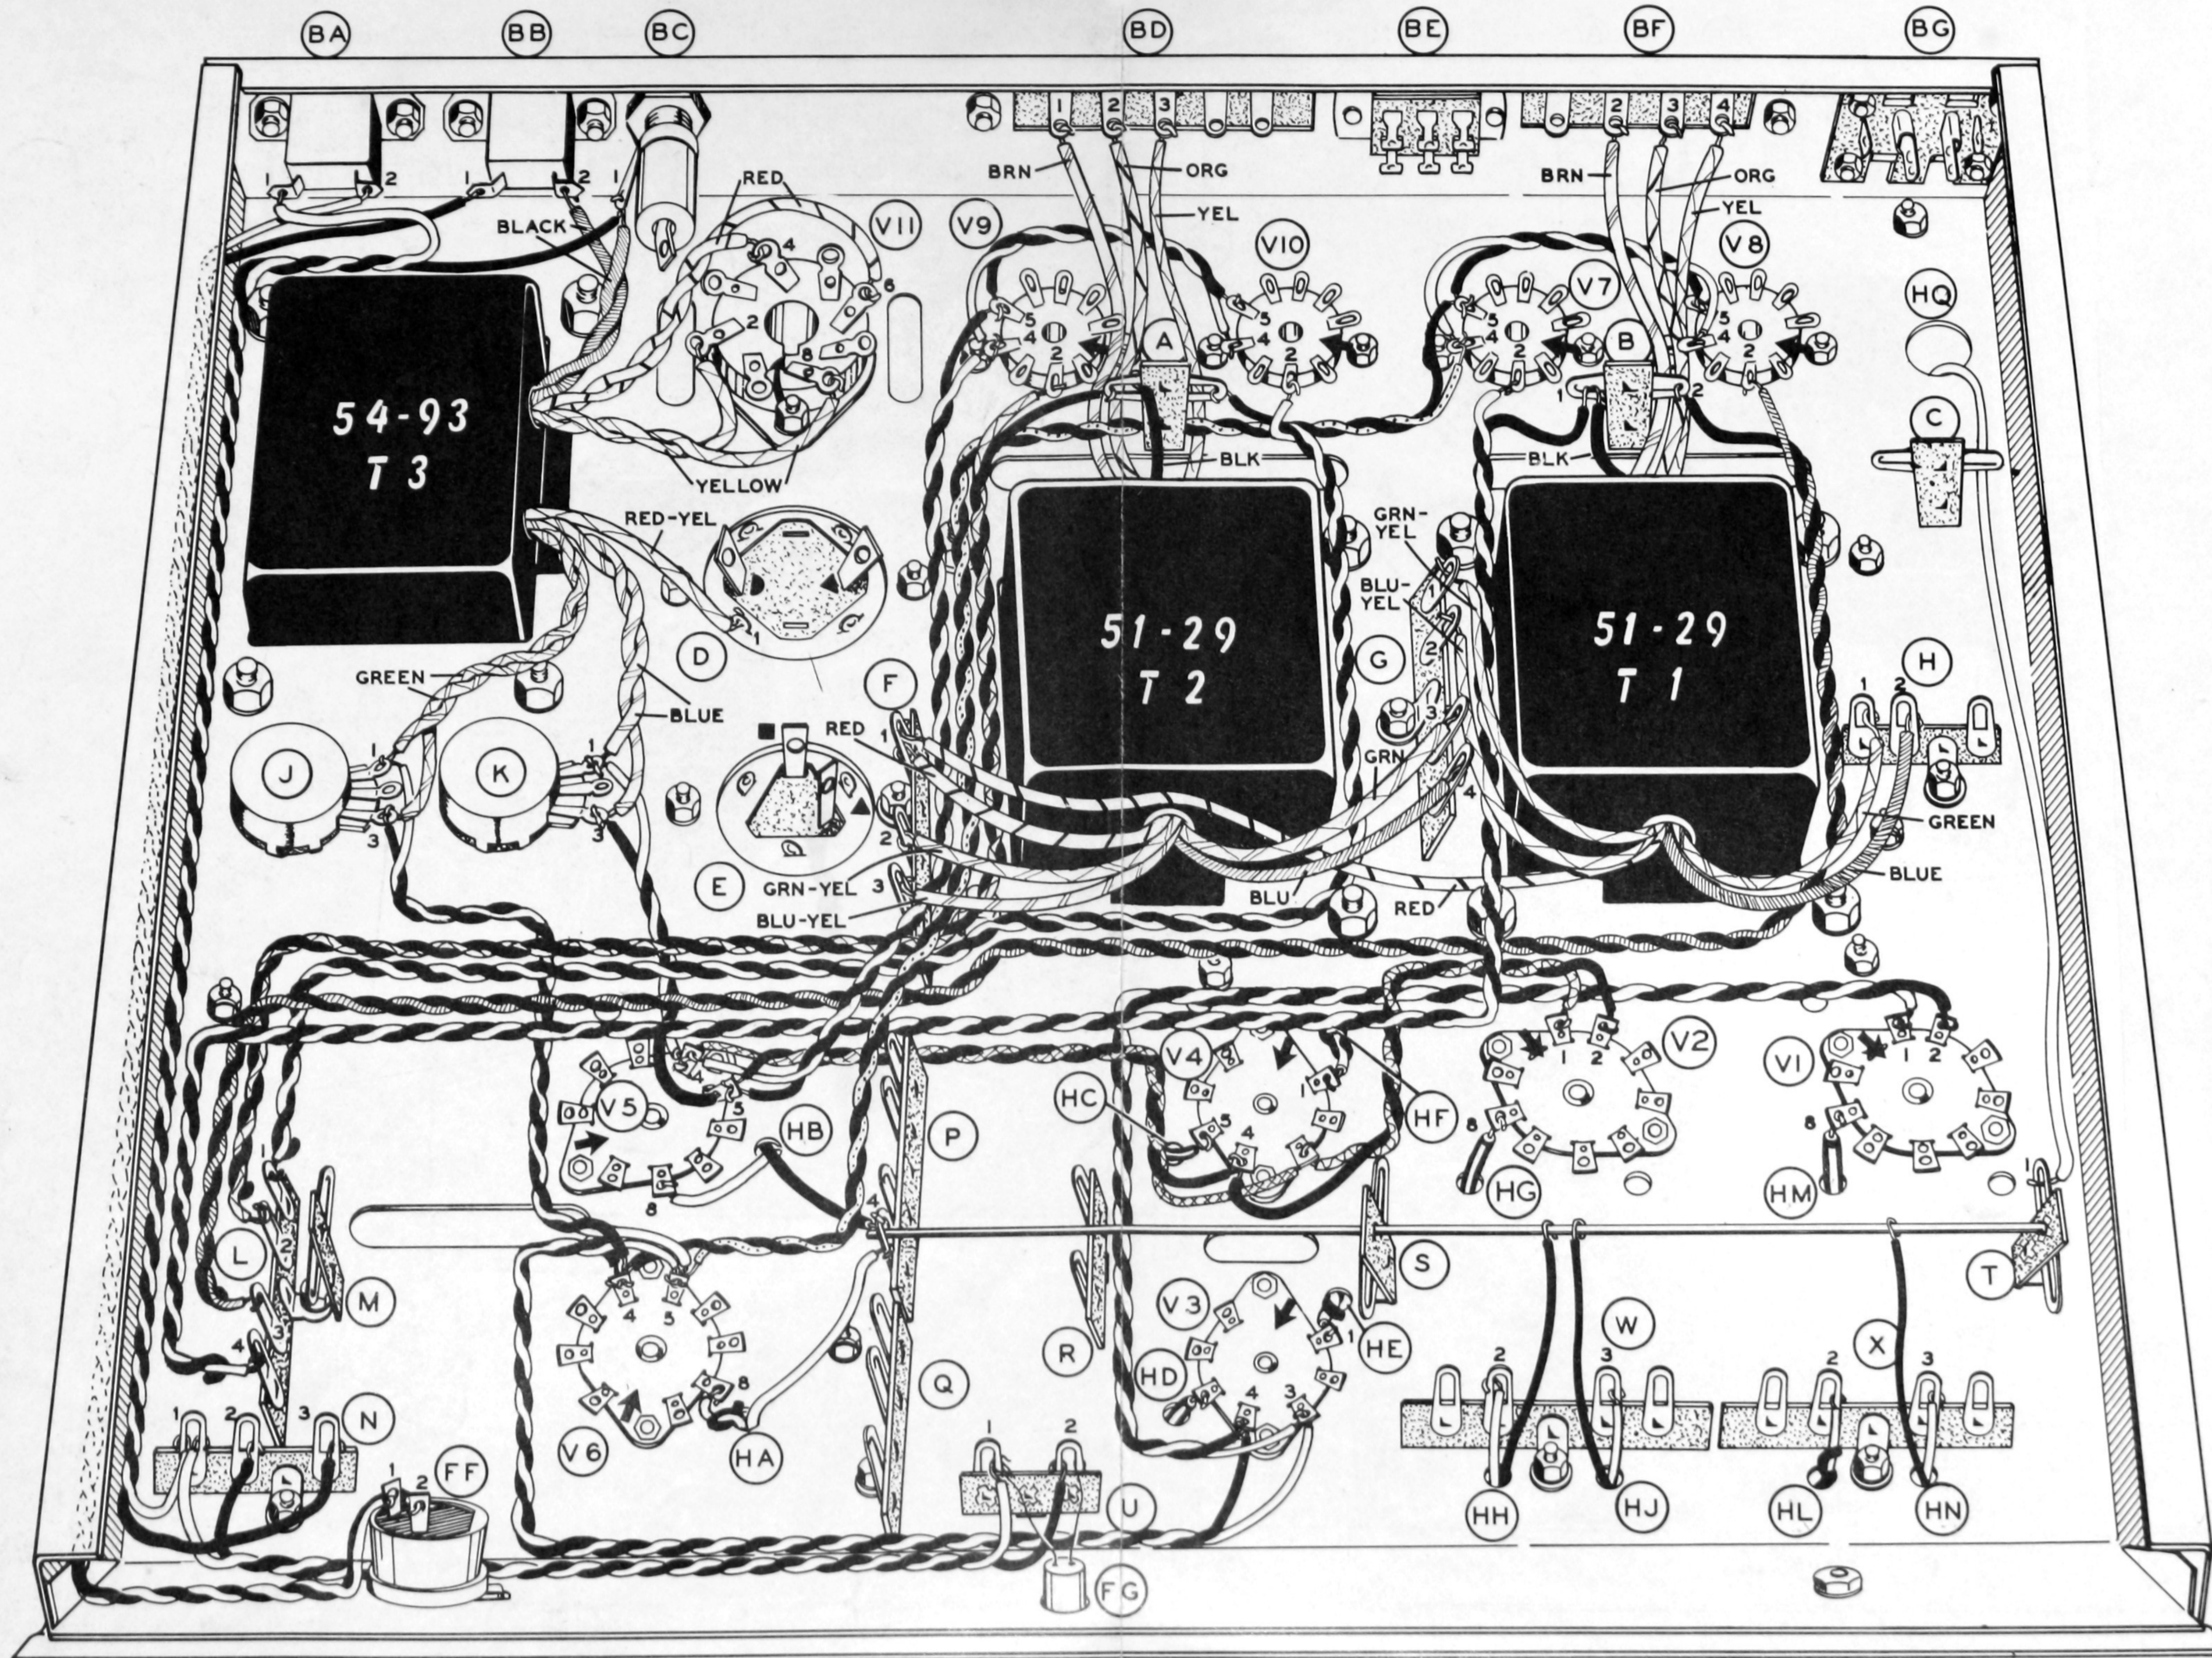

Pictorial 5

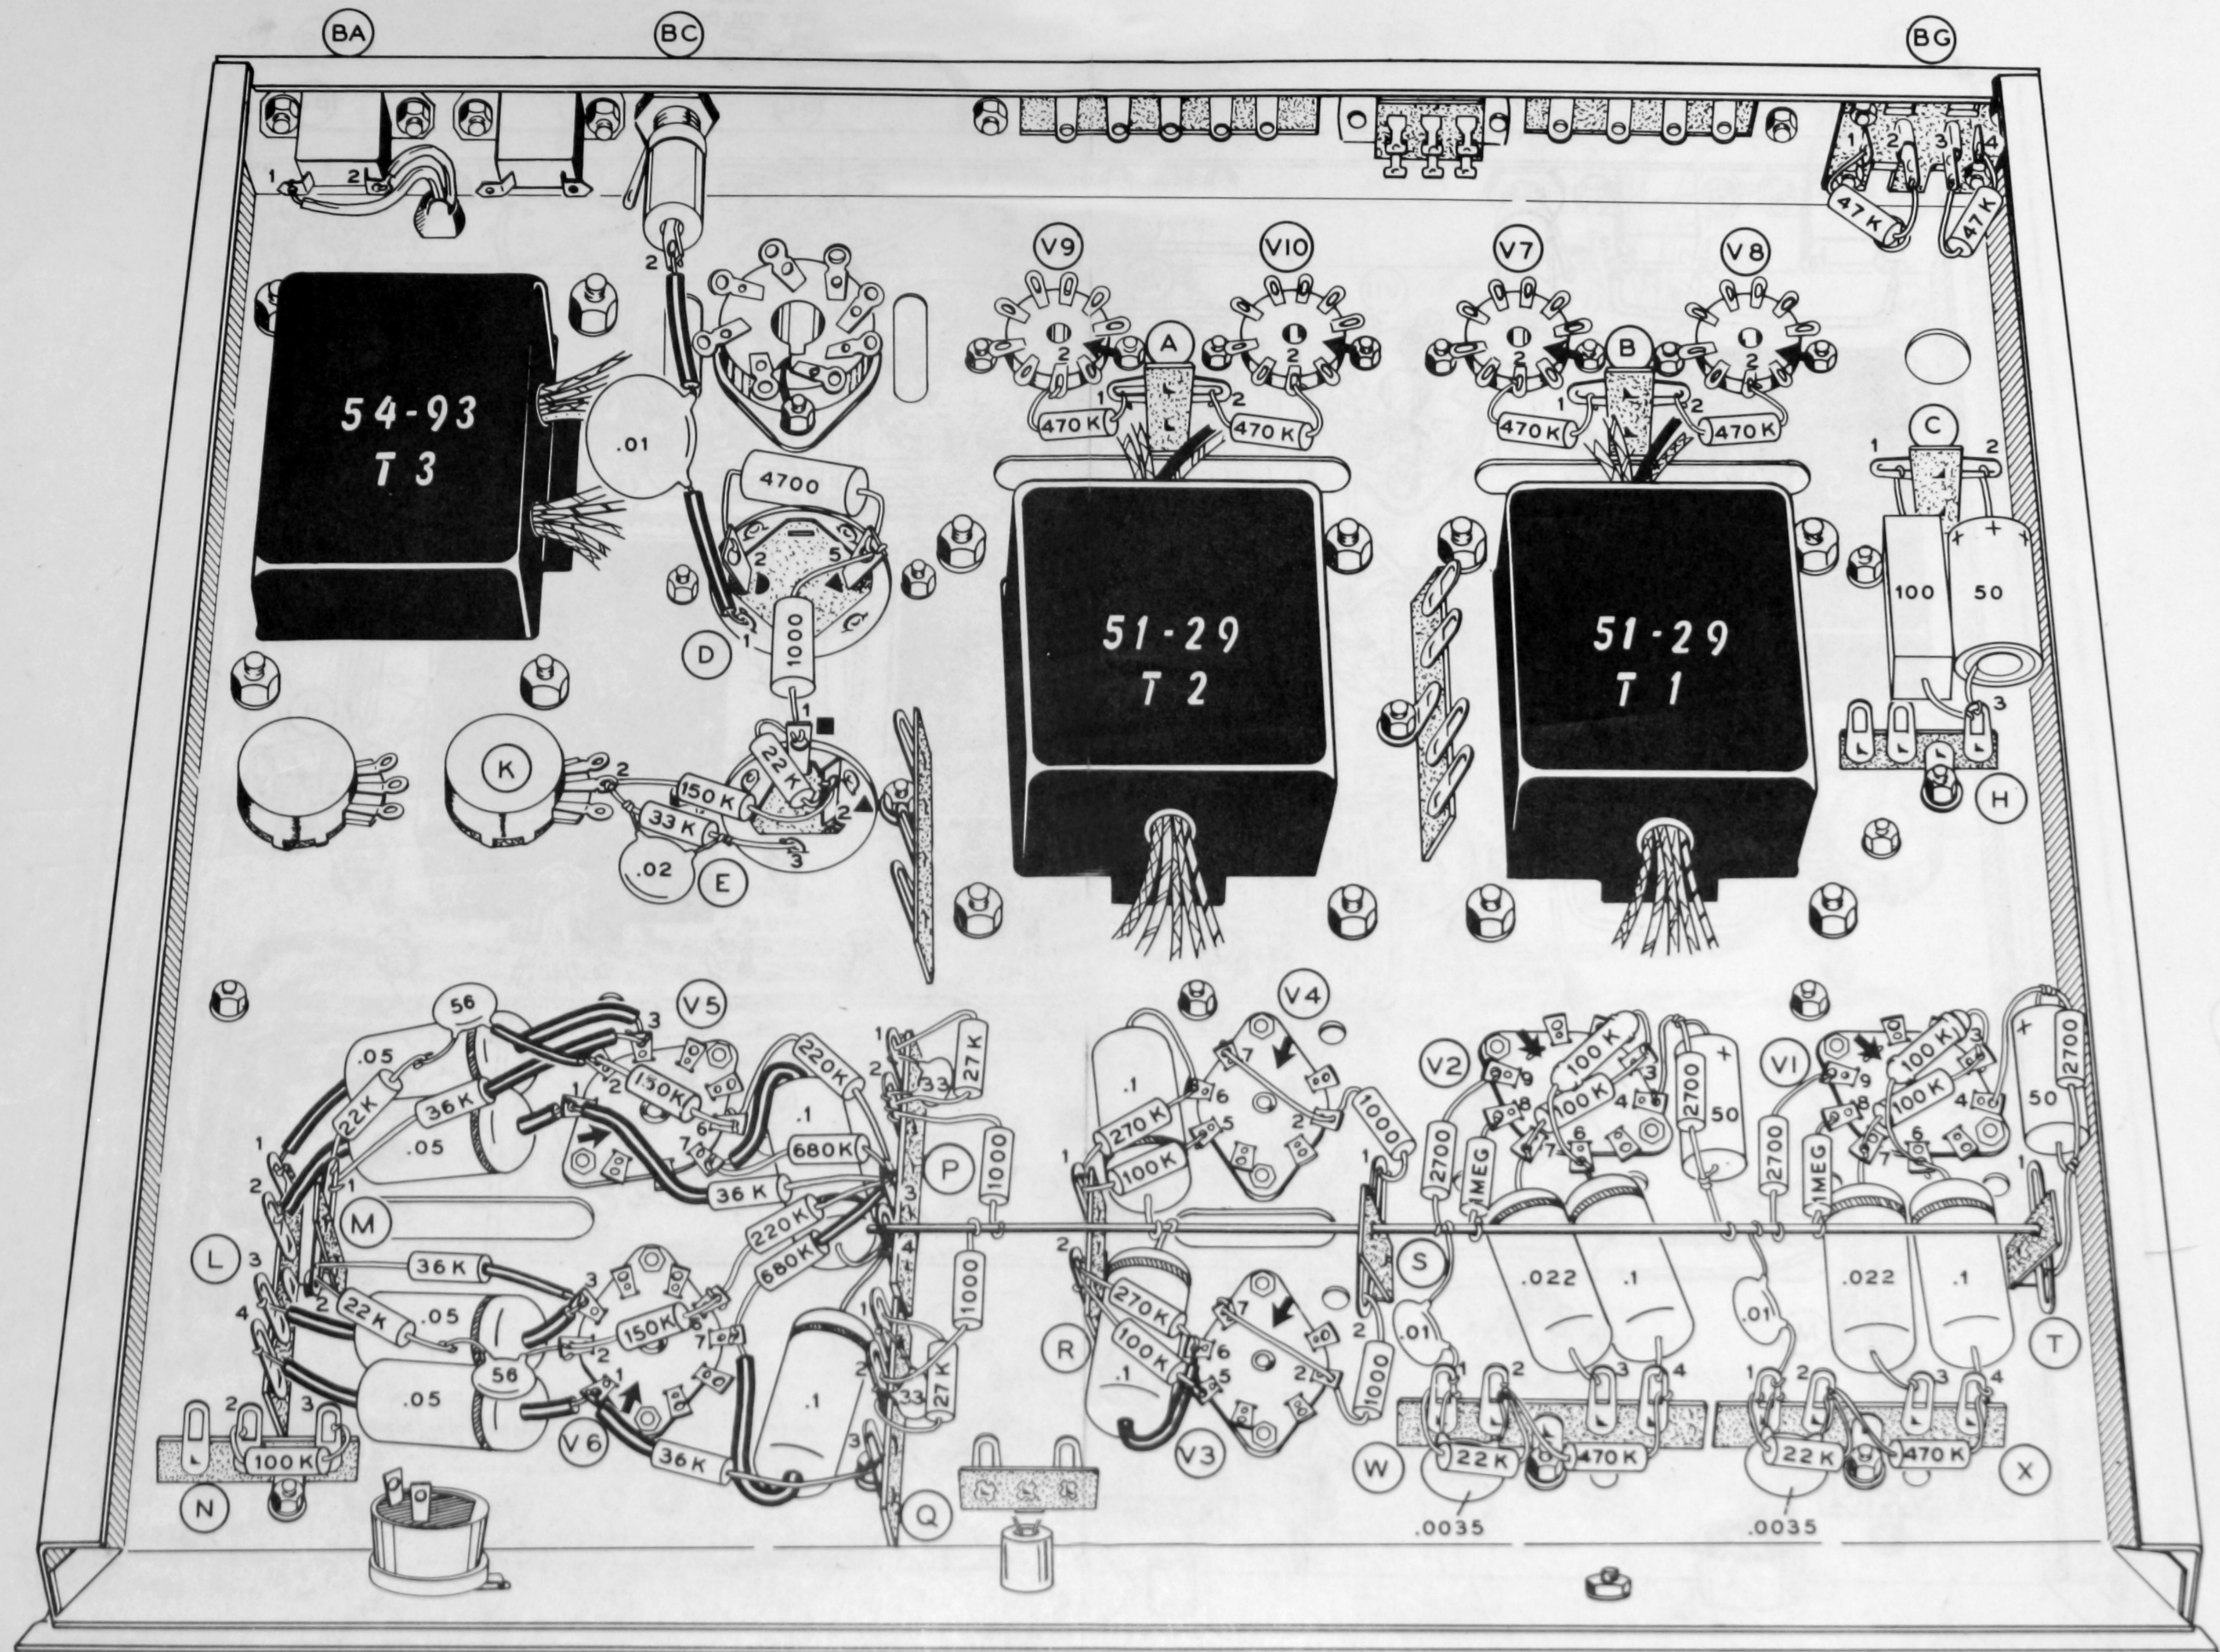


Pictorial 7

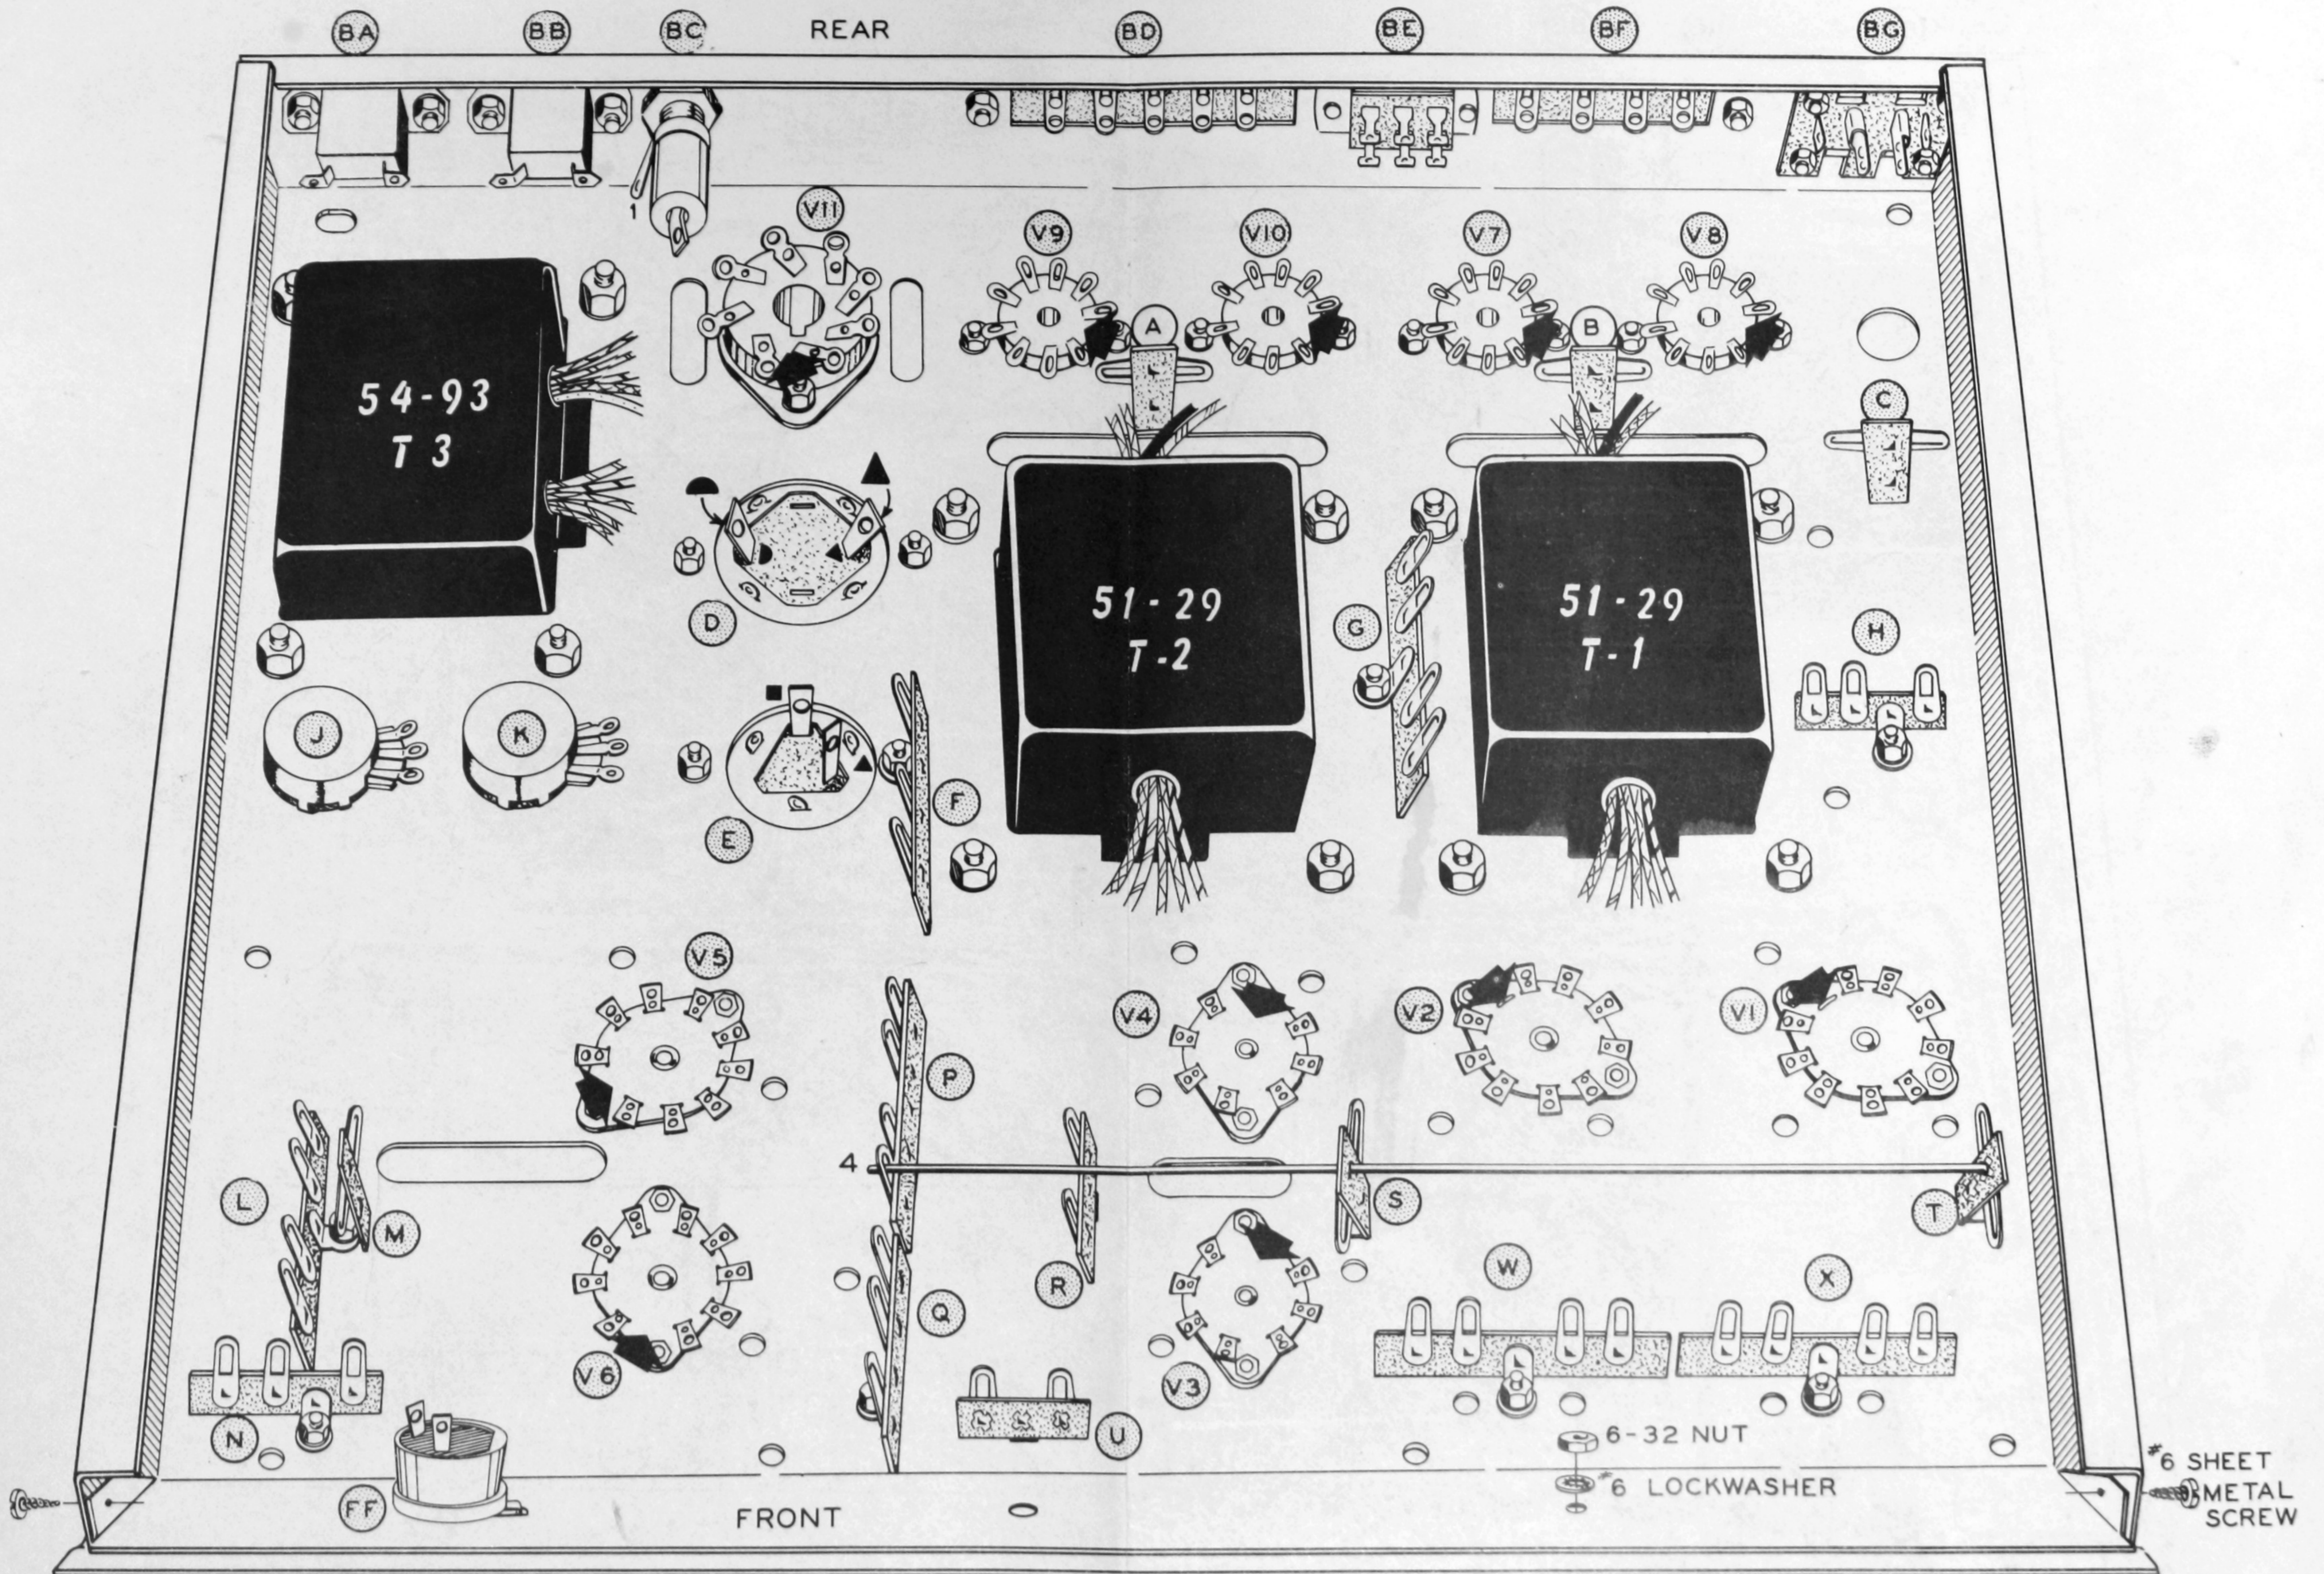


Pictorial 1

CRIMP WITH PLIERS
AND THEN APPLY SOLDER

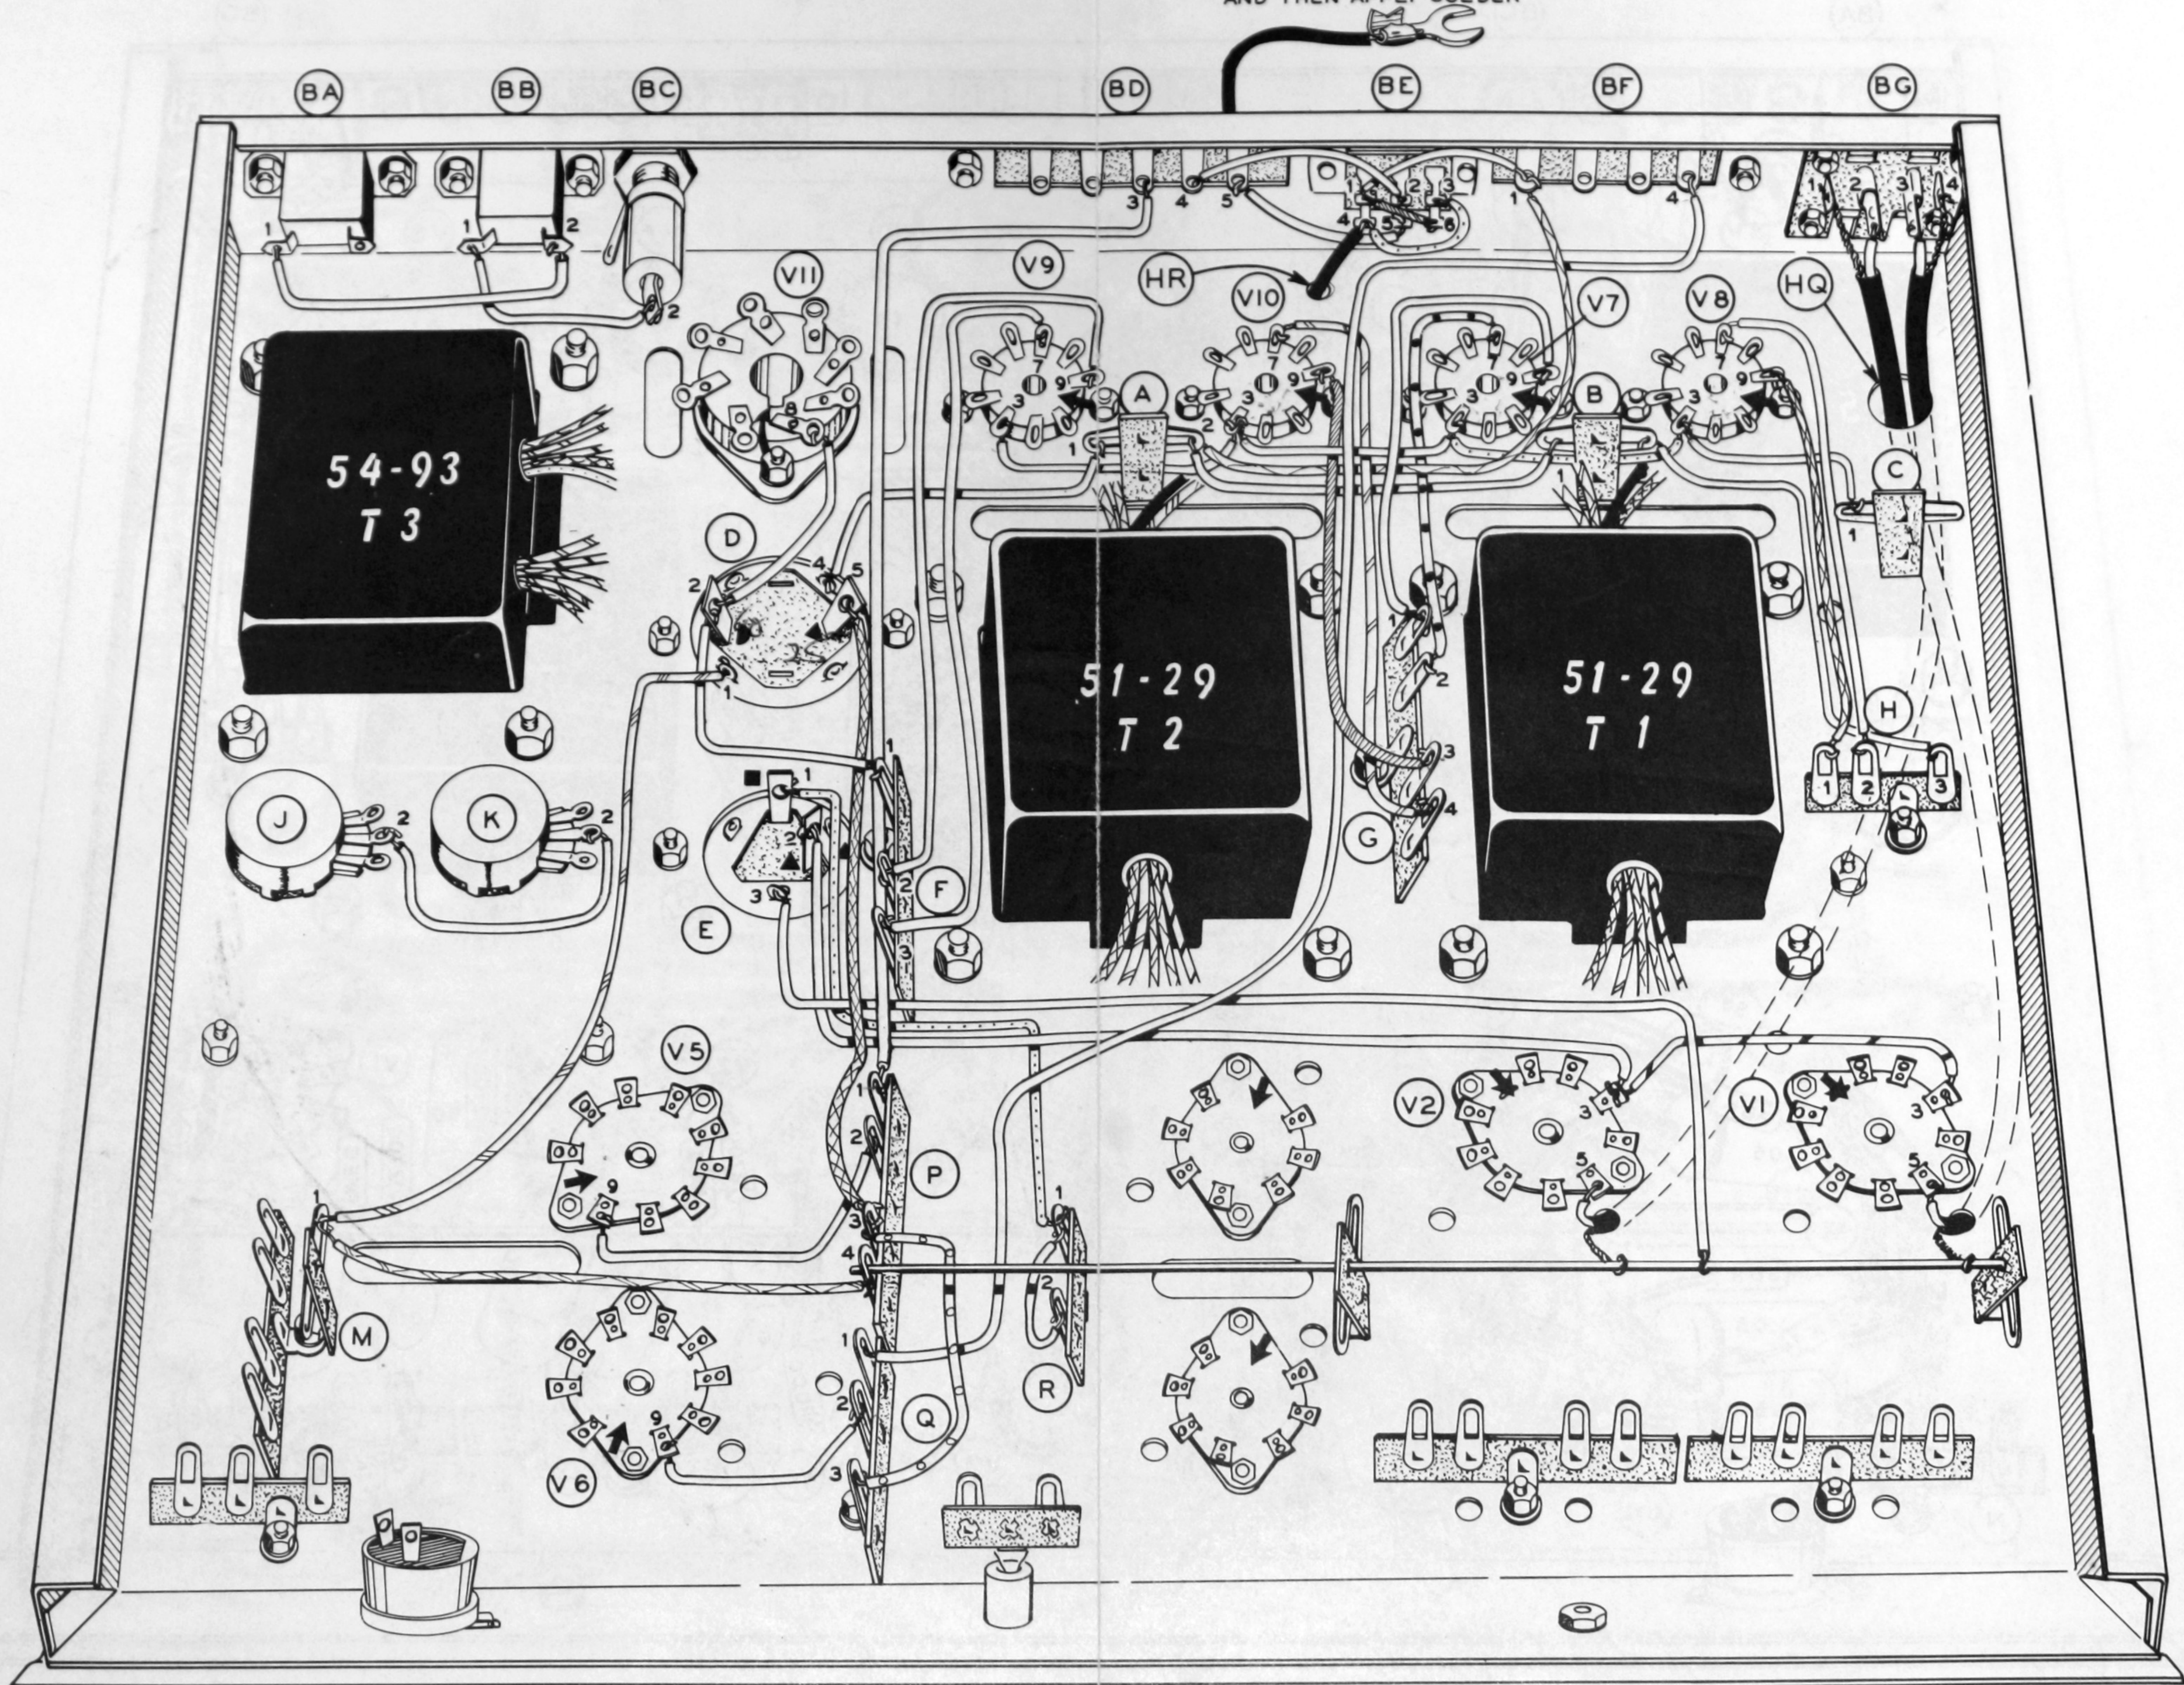

Pictorial 6

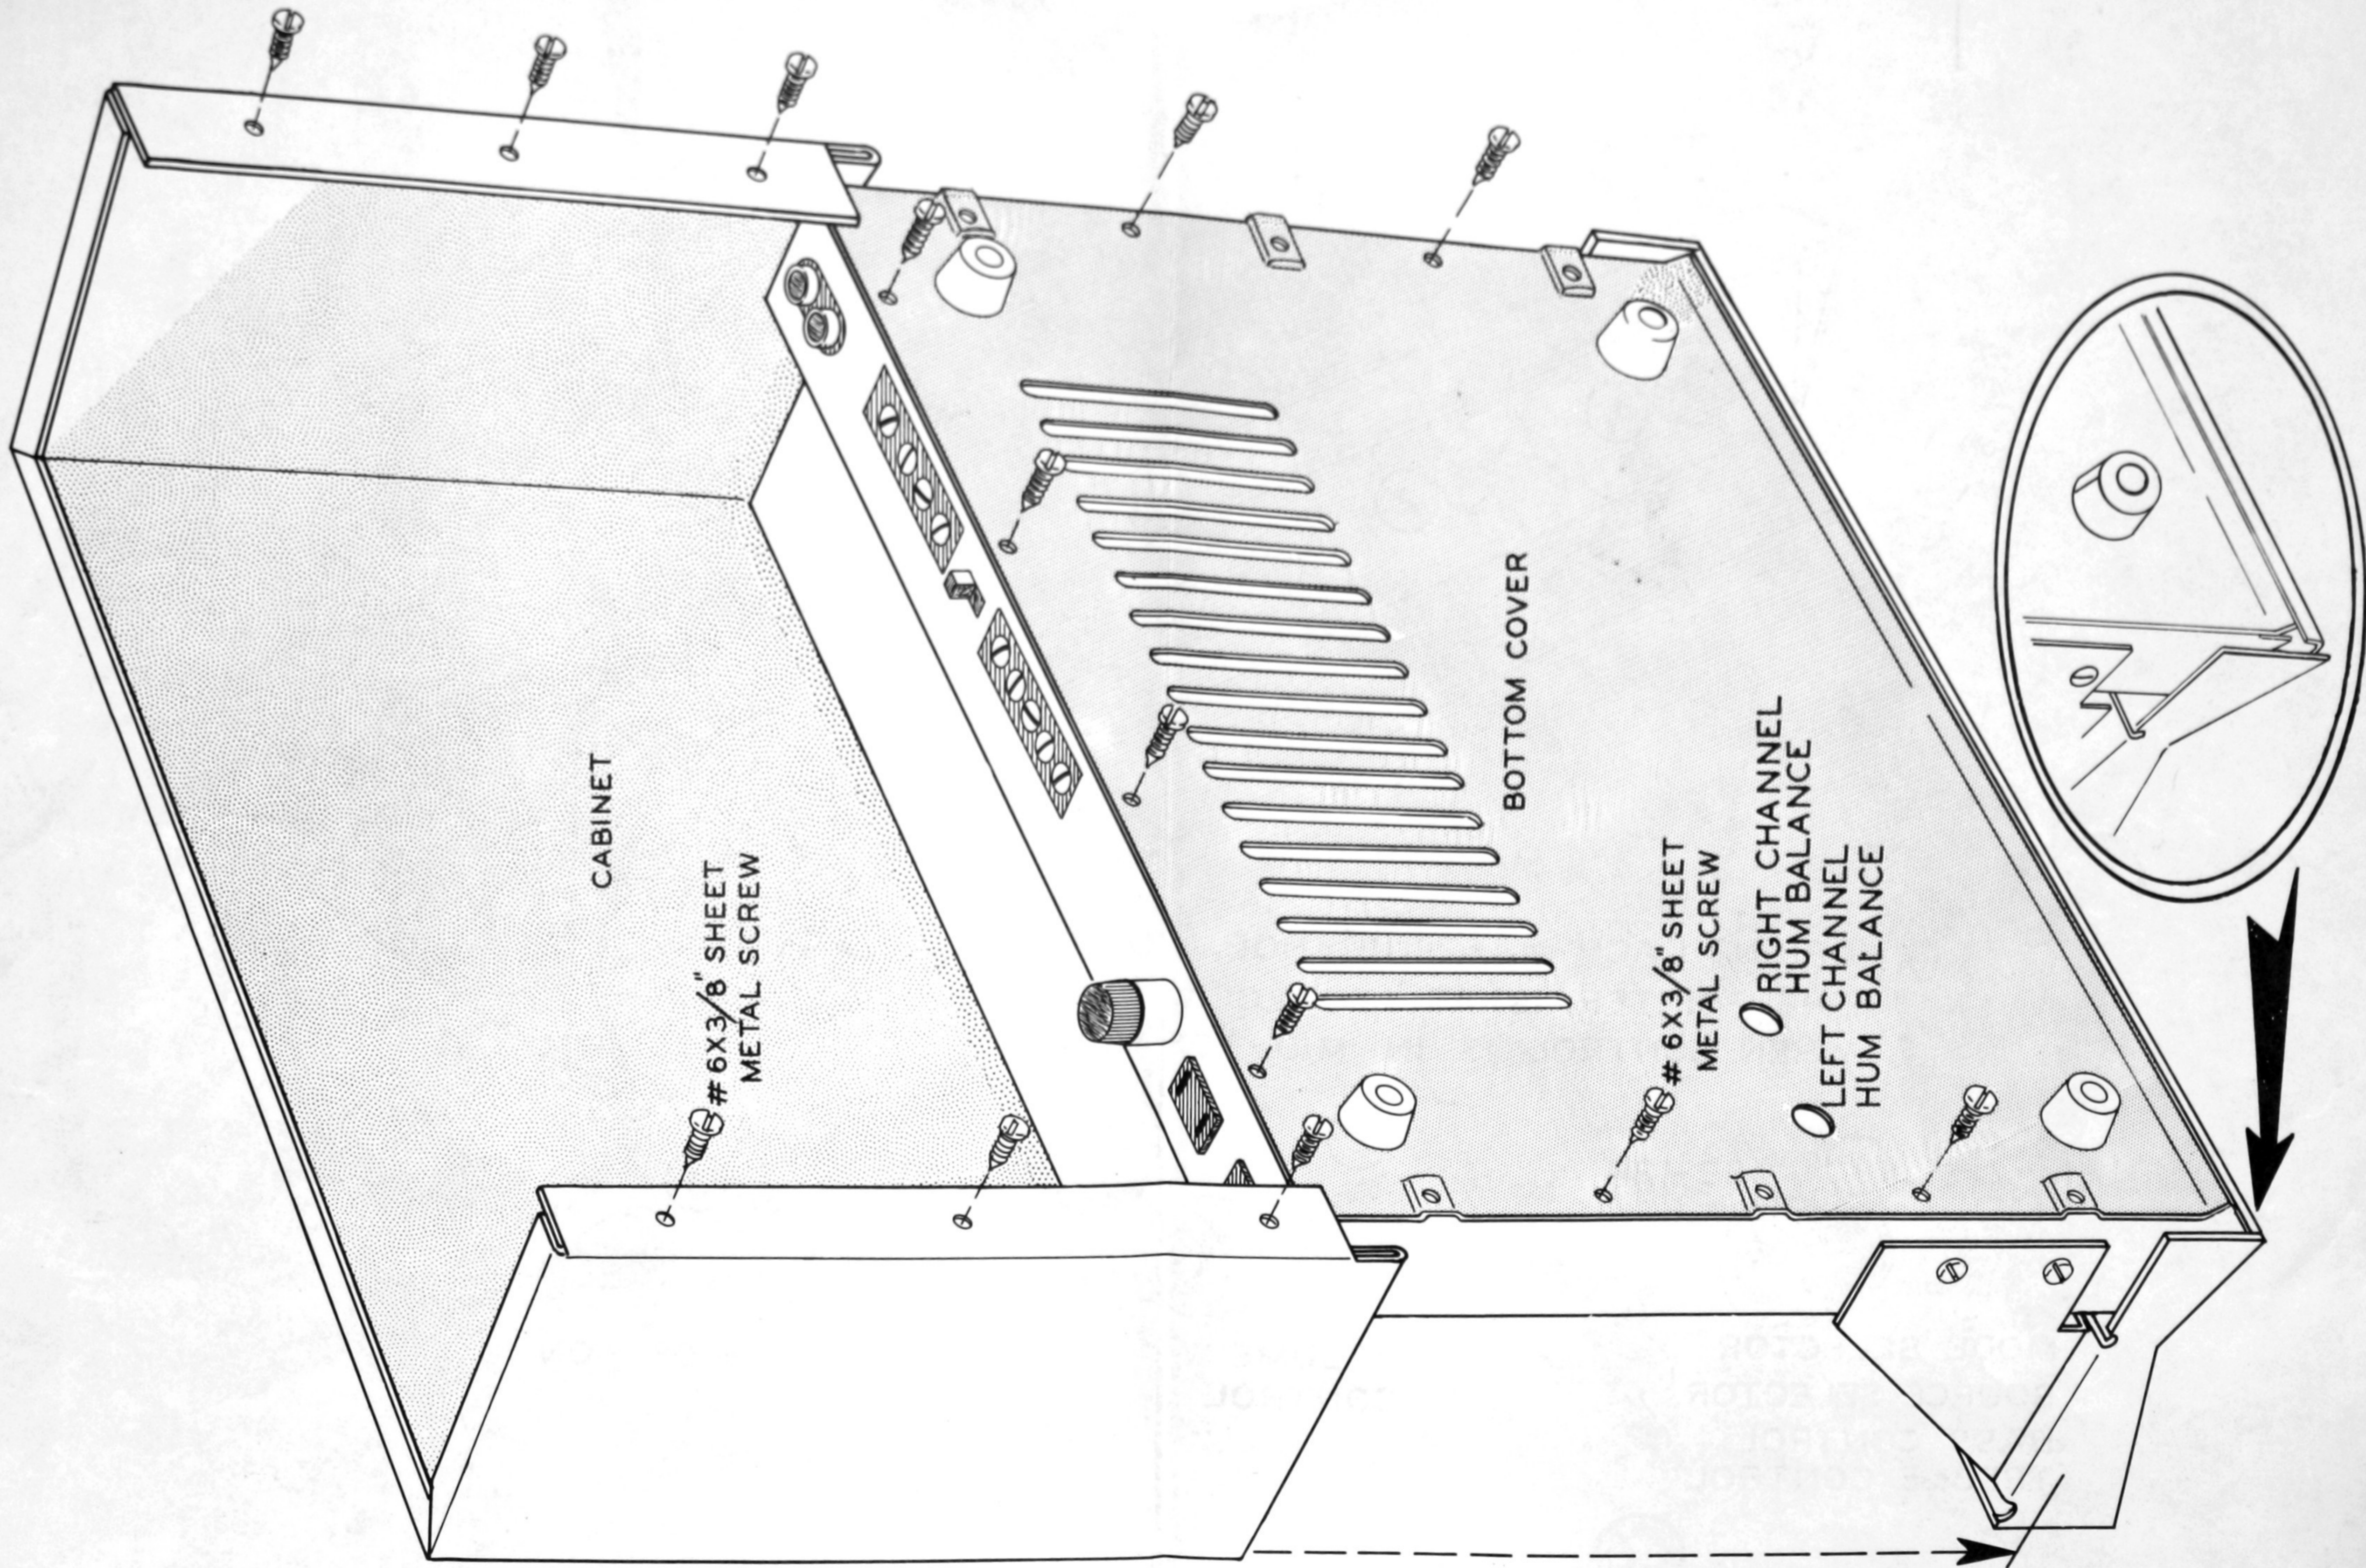

Pictorial 10